

(19) World Intellectual Property  
Organization  
International Bureau



30 MAR 2005




(43) International Publication Date  
15 April 2004 (15.04.2004)

PCT

(10) International Publication Number  
**WO 2004/031017 A1**

- (51) International Patent Classification<sup>7</sup>: **B62B 5/04**
- (21) International Application Number:  
PCT/GB2003/004095
- (22) International Filing Date:  
29 September 2003 (29.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0222672.8 1 October 2002 (01.10.2002) GB
- (71) Applicant (for all designated States except US): **GRAY MATTER (ALPHA) LIMITED** [GB/GB]; The Point, 11 Beadle Garth, Copmanthorpe, York YO23 3YJ (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **GRAY, Andrew** [GB/GB]; The Point, 11 Beadle Garth, Copmanthorpe, York YO23 3YJ (GB).
- (54) Title: **BRAKING ASSEMBLY**
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LI, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

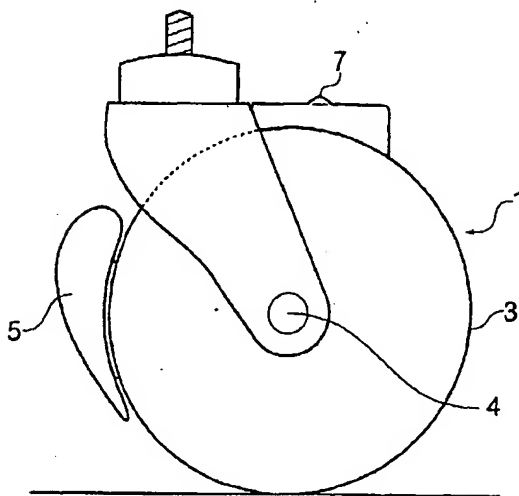

(57) **Abstract:** There is described a vehicle braking assembly for a wheel which comprises a braking member arranged to move relative to the main body of the wheel between an inoperative and an operative position, blocking means adapted to prevent the braking member from moving to an operative position characterised in that the trigger means is operable by coded message passed by a separate transmitter as electromagnetic radiation and the assembly is provided with an LMR sensor.

WO 2004/031017 A1